




M18x1,5 I CTS xx/xxx/xxxxxx x,xx KG 2,0 L PW300 at 15° C PT/PH450BAR EN12245:2009 + A1:2011 I XXXX/XX	UN 1049 Hydrogen Compressed 	CTS COMPOSITE TECHNICAL SYSTEMS  CTS COMPOSITE TECHNICAL SYSTEMS INSTRUCTIONS: 1) Valve screwing torque: 85 Nm 2) Before use, read carefully the user manual. 3) Avoid storing without pressure
TT 1370 PET LINER WARNINGS: FILL IN ACCORDANCE WITH MANUFACTURERS ISTRUZIONI THIS CYLINDER MUST NOT BE SUBJECTED TO A VACUUM AVVERTENZE: RIEMPIRE SECONDO LE ISTRUZIONI DEL FABBRICANTE QUESTA BOMBOLA NON DEVE ESSERE SOTTOPOSTA A VUOTO	FINAL: NLL	
FIRST INSPECTION DATE/DATA PRIMO COLLAUDO: XX/XXXX	RETESTING / RICOLLAUDO	

Verification Body Number

Verification Body Logo

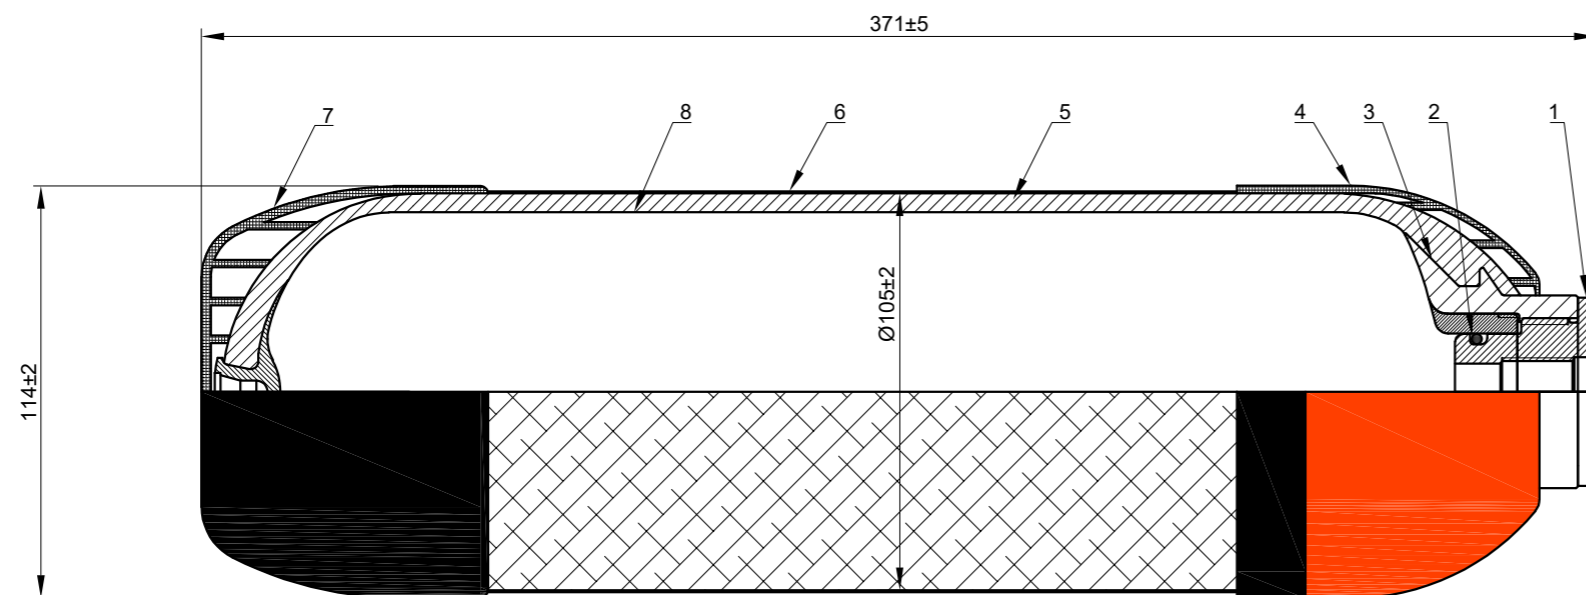

Legend:

① Inner boss (internal nozzle)

THREADS	
STANDARD THREAD	M18x1.5 - EN ISO 15245-1
OTHER COMMON THREADS AVAILABLE ON REQUEST	

② O-ring

③ Outer boss (external nozzle)

④ Upper rubber cap

⑤ Composite stratification layer

⑥ Optional exterior finishing

⑦ Bottom rubber cap

⑧ Internal PET liner

CTS SpA Type 4 cylinders Data Sheet:
2.0 lt 300 bar Hydrogen

Working pressure: 300 bar (4351 psi)	Boss (nozzles) material: Anodized aluminum alloy OR Stainless steel
Test pressure: 450 bar (6527 psi)	Liner material: PET
Min. design burst pressure: >900 bar (13053 psi)	Reinforcement material: Carbon fiber + Epoxy resin
Water capacity: 2.0 L (122.04 cu. inch)	Hydrogen mass: 42 g (1.48 oz)
Exterior finishing: Customer specifications	
Service life: non limited (NLL) according to EN 12245:2009 + A1:2011	Developed pressure at 60°C: 349 bar (5062 psi)
Specifications: EN 12245:2009 + A1:2011; European Directive TPED 2010/35/UE, ADR 2017 or European Directive PED 2014/68/UE	Approved gases: UN 1049 Hydrogen, compressed



The image has the only purpose to represent the product.

Cylinder layout	Description and notes	Empty cylinder weight - Aluminum alloy	Empty cylinder weight - Stainless steel
Cylinder without finishings (bare cylinder)	Without finishings	1.25±0.09 kg 2.76±0.20 lbs	1.67±0.09 kg 3.68±0.20 lbs
Finished cylinder with transparent coating	Finished cylinder with transparent coating and rubber caps.	1.52±0.09 kg 3.35±0.20 lbs	1.94±0.09 kg 4.28±0.20 lbs
Finished cylinder with yellow or black sleeve	Finished cylinder with coloured sleeve (black or yellow), transparent sleeve and rubber caps.	1.61±0.09 kg 3.55±0.20 lbs	2.03±0.30 kg 4.48±0.20 lbs